
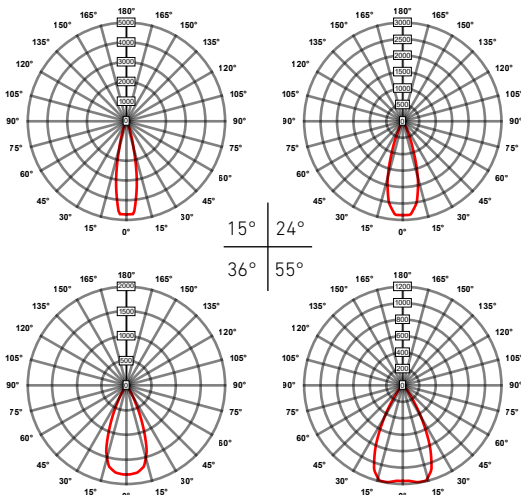


# Nova Medium 62

## Specification Sheet



### Housing Size

170 mm x 62 mm diameter

### Mounting

- |  |   |
|--|---|
| <input type="checkbox"/> Suspended Track | <input type="checkbox"/> Surface Track*   |
| <input type="checkbox"/> Surface Track   | <input type="checkbox"/> Suspended Track* |
| <input type="checkbox"/> Recessed Track  | <input type="checkbox"/> Recessed Track*  |

\*in-track driver

### Colour & Finishes

#### Body

- |                                 |  |
|---------------------------------|--|
| <input type="checkbox"/> White  | <input type="checkbox"/> Mirror Chrome |
| <input type="checkbox"/> Black  | <input type="checkbox"/> Charcoal      |
| <input type="checkbox"/> Bronze | RAL - Specify RAL                      |
| <input type="checkbox"/> Gold   | <input type="text" value=""/>          |

#### Baffle

- |                                |                               |
|--------------------------------|-------------------------------|
| <input type="checkbox"/> White | <input type="checkbox"/> Gold |
| <input type="checkbox"/> Black |                               |

#### Track Adapter

- |                                |                                 |
|--------------------------------|---------------------------------|
| <input type="checkbox"/> White | <input type="checkbox"/> Silver |
| <input type="checkbox"/> Black |                                 |

#### Track

- |                                |                                 |
|--------------------------------|---------------------------------|
| <input type="checkbox"/> White | <input type="checkbox"/> Silver |
| <input type="checkbox"/> Black |                                 |

### Optics

- |                                   |                                   |
|-----------------------------------|-----------------------------------|
| <input type="checkbox"/> 15° beam | <input type="checkbox"/> 36° beam |
| <input type="checkbox"/> 24° beam | <input type="checkbox"/> 60° beam |

### Light Output

- |  |  |
|--|--|
| <input type="checkbox"/> MIN - 932 lm/8.1 W* | <input type="checkbox"/> MED - 1530 lm /13.5W* |
| <input type="checkbox"/> LOW -1379 lm/12 W*  |  |

### CCT

- |                                      |                                      |
|--------------------------------------|--------------------------------------|
| <input type="checkbox"/> 827 - 2700K | <input type="checkbox"/> 927 - 2700K |
| <input type="checkbox"/> 830 - 3000K | <input type="checkbox"/> 930 - 3000K |
| <input type="checkbox"/> 835 - 3500K | <input type="checkbox"/> 935 - 3500K |
| <input type="checkbox"/> 840 - 4000K | <input type="checkbox"/> 940 - 4000K |

### Dimming

- |  |                                   |
|--|-----------------------------------|
| <input type="checkbox"/> Non-dim       | <input type="checkbox"/> Dali Dim |
| <input type="checkbox"/> Phase dimming |                                   |

\*Based on 36° beam and 4000K