


Serpentine Shallow 60

SPTSLW60 — LED
62 mm x 50mm



LIGHT FORMS

Curves

With its elegant curves, Serpentine adds a sophisticated touch to any interior. Available as individual luminaires, continuous runs, custom configurations, and in a wide range of colours and finishes.



Features

Individual Fixture, Continuous Run or Custom Configuration

Direct Distribution

Four Standard Output Options

Tunable White and RGB+W Options

Remote DALI, 10V, Wireless or Phase Driver

Dimming Down to 0%

Remote Sensor Options

White, Black, Bronze or Custom RAL Finish

Custom shapes available, contact factory

Photometry and additional documentation at: LightForms.com/products/all/serpenteshallow60/

Serpentine Shallow 60

LIGHT FORMS

Product Options

Mounting Options

Vertical Suspended
Rod Suspended
Surface Mount
Recessed

Shape Options

Curve
Soft Square
Soft Triangle
Obround
Ellipse
Custom

CRI Options

80CRI
90CRI

CCT Options

2700K
3000K
3500K
4000K
6500K
2700-6500K

Control Options

Non Dimmable
DALI
1-10V DMX
Phase Dimmable
Wireless

Direct Output Options @ 80CRI 4000K

Minimum		964lm/m
Low	-	1435lm/m
Medium	-	2551lm/m
High	-	4341lm/m
Tuneable Low		1252lm/m
Tuneable Medium		2279lm/m
RGBW		809lm/m

Lens Options

Clear Prismatic
Opal Prismatic
Opal

Additions

DALI motion sensor
Standard motion Sensor
BASIC 3 hour emergency
DALI 3 hour emergency


Click here to navigate to the online Product Configurator.




Serpentine Shallow 60

LIGHT FORMS

Dimensions

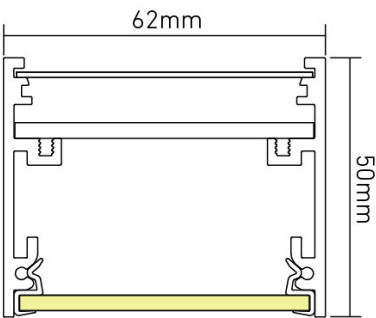


Distribution



Serpentine Shallow 60

LIGHT FORMS

Body Colours

	9005	Jet Black		7022	Umbr Grey
	9010	Pure White		7023	Concrete Grey
	1001	Beige		7024	Graphite Grey
	1002	Sand Yellow		7026	Granite Grey
	1007	Daffodil yellow		7030	Stone Grey
	1034	Pastel Yellow		7032	Pebble Grey
	1035	Pearl Beige		7035	Light Grey
	2004	Pure Orange		7037	Dusty Grey
	3011	Brown Red		7043	Traffic Grey B
	3012	Beige Red		7047	Telegrey 4
	4002	Red Violet		7048	Pearl Mouse Grey
	5001	Green Blue		8004	Copper Brown
	5002	Ultramarine Blue		8015	Chestnut Brown
	5008	Grey Blue		8019	Grey Brown
	5009	Azure Blue		8025	Pale Brown
	5011	Steel Blue		9001	Cream
	5012	Light Blue		9002	Grey White
	5013	Cobalt Blue		9003	Signal White
	5025	Pearl Gentian Blue		9004	Signal Black
	6000	Patina Green		9006	White Aluminium
	7009	green Grey		9007	Grey Aluminium
	7010	Tarpaulin Grey		9011	Graphite Black
	7012	Basalt Grey		9016	Traffic White
	7016	Anthracite Grey		9017	Traffic Black
	7021	Black Grey			


Light Forms also covers an extensive range of premium finishes, including specialist metallic finishes.




YW387I
Ordos Sable




M3000I
Nickel Metallic



S2304I
Metallic Fine Texture



YX355F
Mars Sable



YW255F
Golden Beach



Y2205I
Golden Splendour




Y2M30I
Dark Bronze



RW404I
Copper Coarse



EW002E
Aluminium Metallic
Gloss



Y2214F
Anodic Bronze



For full details
and links to the
Interpon powder
range, click here.

Serpentine Shallow 60


LIGHT FORMS

Housing


100% recyclable, extruded architectural grade aluminium with minimum 2mm thickness.

Suspension mount canopy options


Number of suspension points may vary depending on size.

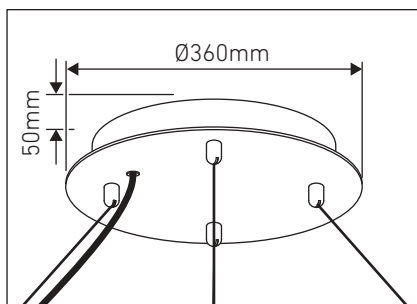

CS - Central Suspended

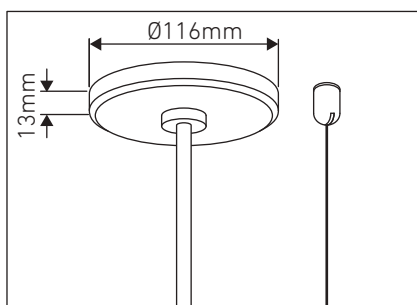

VS - Vertical Suspended

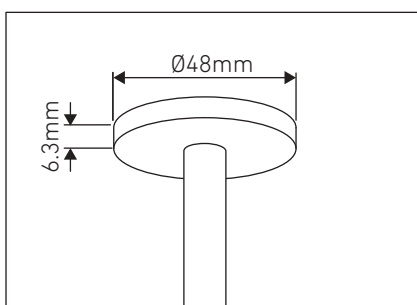

RD -Rod Suspended

*Length to be confirmed by site, not adjustable on site

Integral Downlights

Optional, aimable accent downlight spots deliver up to 1430 lumens with beam spreads from 15° to 40°.

Limitations apply. See Downlight Spots chart for further information.

Integral sensors

Optional, presence (PRES), DALI-compatible PIR presence (DALI/PRES) and daylight harvesting (PHOTO) sensors available. Contact Light Forms for further information.

Weight

Approximately 2380 grams per linear metre. Weight will increase with the addition of integral downlights, sensors, and emergency batteries and may vary further depending on mounting and other options.

Operating temperature

Luminaire MUST be installed and operated ONLY in dry or damp environments where the ambient temperature ranges from -20°C to 50°C. Luminaire operation in environments outside this temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and colour consistency.

Warranty

5-year limited warranty.

Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe



United Kingdom



Greater India
and Middle East