
Indirect / Direct

Suspended Wall Surface (direct only)

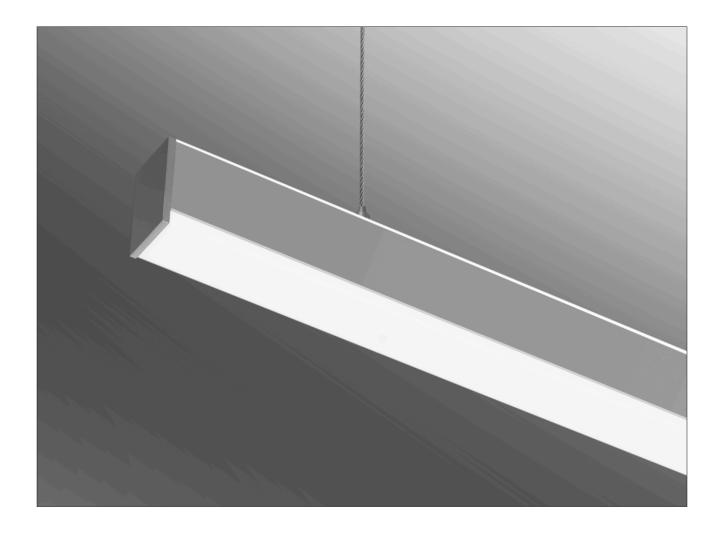

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)


## LIGHT FORMS

### 1. Base Model

LP1HSID LP1HWID LP1HSM Suspended - Indirect/Direct
Wall Mounted - Indirect/Direct
Surface Mounted (Direct only - snap clip - see below)

Snap Clip facilitates an easily removable and replaceable surface mounted fitting.





### 2. Run Length/Size

Enter length in mm for custom lengths.
See **Standard Lengths and Shapes** PDF for standard products.

### 3. LED Lamping (indirect uplight)

(data quoted for Flat Lens)

INDMED - xxxxK

INDCV - xxxxK

INDSTD - TW INDHI - TW

INDSTD - RGBW - xxxxK

INDHI - RGBW - xxxxK

### 4. LED Lamping (direct downlight)

(data quoted for Drop Lens)

MED - xxxxK

CV - xxxxK

STD - TW HI - TW

STD - RGBW - xxxxK

HI - RGBW - xxxxK

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)

## LIGHT FORMS

### 5. LED Driver (remote only)

1-10V1-10V dimmingDALIDALI dimmingDMXDMX dimmingNONDIMNon-dimmable

OTHER (Consult factory for options)

### 6. Lens

CV / FLAT Aluminium Cover on top / FLAT Lens for downlight
CV / DROP Aluminium Cover on top / DROP Lens for downlight
FLAT / FLAT FLAT FLAT Iens for uplight / FLAT lens for downlight
FLAT / DROP FLAT lens for uplight / DROP lens for downlight
DROP / DROP DROP DROP DROP Iens for downlight



Choose CV / FLAT or CV / DROP with LP1HSM (surface mounted).

### 7. Finish

AL Standard, natural aluminium

BK Black powdercoat WH White powdercoat

RAL/ \_\_\_ Specify RAL powdercoat (ex: #RAL/3003)

BRONZE Bronze powdercoat

### 8. Canopy

NC No canopy (for Wall or Surface mounted)
STD Standard canopy & separate suspension

COMBO Combo suspension canopy

SMALL Small canopy & separate suspension

### 9. Additional options

EM 3 hour Emergency Kit - remote

DALIEM 3 hour DALI Emergency Driver/Battery - remote

DALIEMPRO 3 hour DALI EMPRO Emergency Driver/Battery - remote


PIR-A PIR Absence Detector - remote
PIR-P PIR Presence Detector - remote
DALIPIR DALI PIR Sensor - remote

OTHER Contact Factory


Suspended, Wall, (Indirect / Direct) - Surface (Direct only)

## LIGHT FORMS

## **Dimensions**

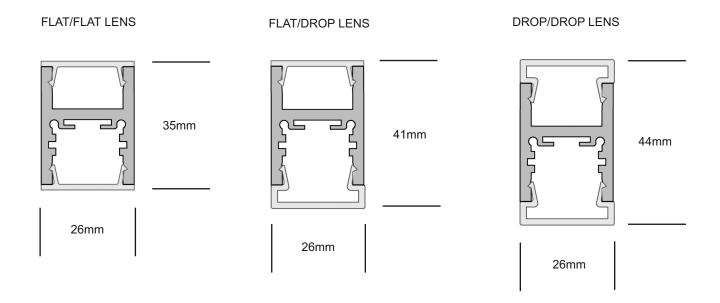

## **Mounting Options**

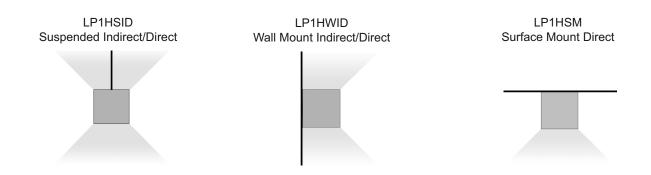

Suspended, Wall, (Indirect / Direct) - Surface (Direct only)

## LIGH7 **FORMS**

#### Housing

100% recyclable, extruded architectural grade T6061 aluminium

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

### Suspension Hardware

STD Standard separate 115mm diameter

power canopy and suspension

COMBO 115mm diameter canopy and

suspension are combined

**SMALL** 82mm diameter small separate

power canopy and suspension

### **Options**

Mitered Corners

Consult factory for mitered corner angle options.

#### **Finish**

Standard finish is "Ultimatte" aluminium - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process. White, Black, Bronze or custom RAL powdercoat options are also available.



WH - WHITE

**BK** - BLACK



**AL** - ALUMINIUM



**BRONZE** 



RAL/\_



STD



Combo



Small



**Mitered Corners** 

LIGHT FORMS - CONFIGURATION SHEET - REV 5

### **Light Forms**

Architectural Lighting www.lightforms.com

Registered in England No. 6750892 Registered Address Unit 7C Boeing Way International Trading Centre Middlesex, UB2 5LB

### UK

Unit 7C Boeing Way International Trading Estate Middlesex UB2 5LB

T +44 (0)20 8571 3785 F +44 (0)20 8090 3755 E ask@lightforms.com

### India

353/2 Dr Hira Singh Road Civil Lines Ludhiana 141001 Punjab, India

Default canopy finish is to match fitting color, unless otherwise specified

T +91 98 7280 0488

E ajay@lightforms.com

### China

Unit 3, Building A No. 9 Phoenix Road Torch Development Area Zhongshan City Guangdong China 528437

T +86 760 899 370 38 F +86 760 899 370 39 E ckirin@lightforms.com