


MICRO-C

Corner Mounted

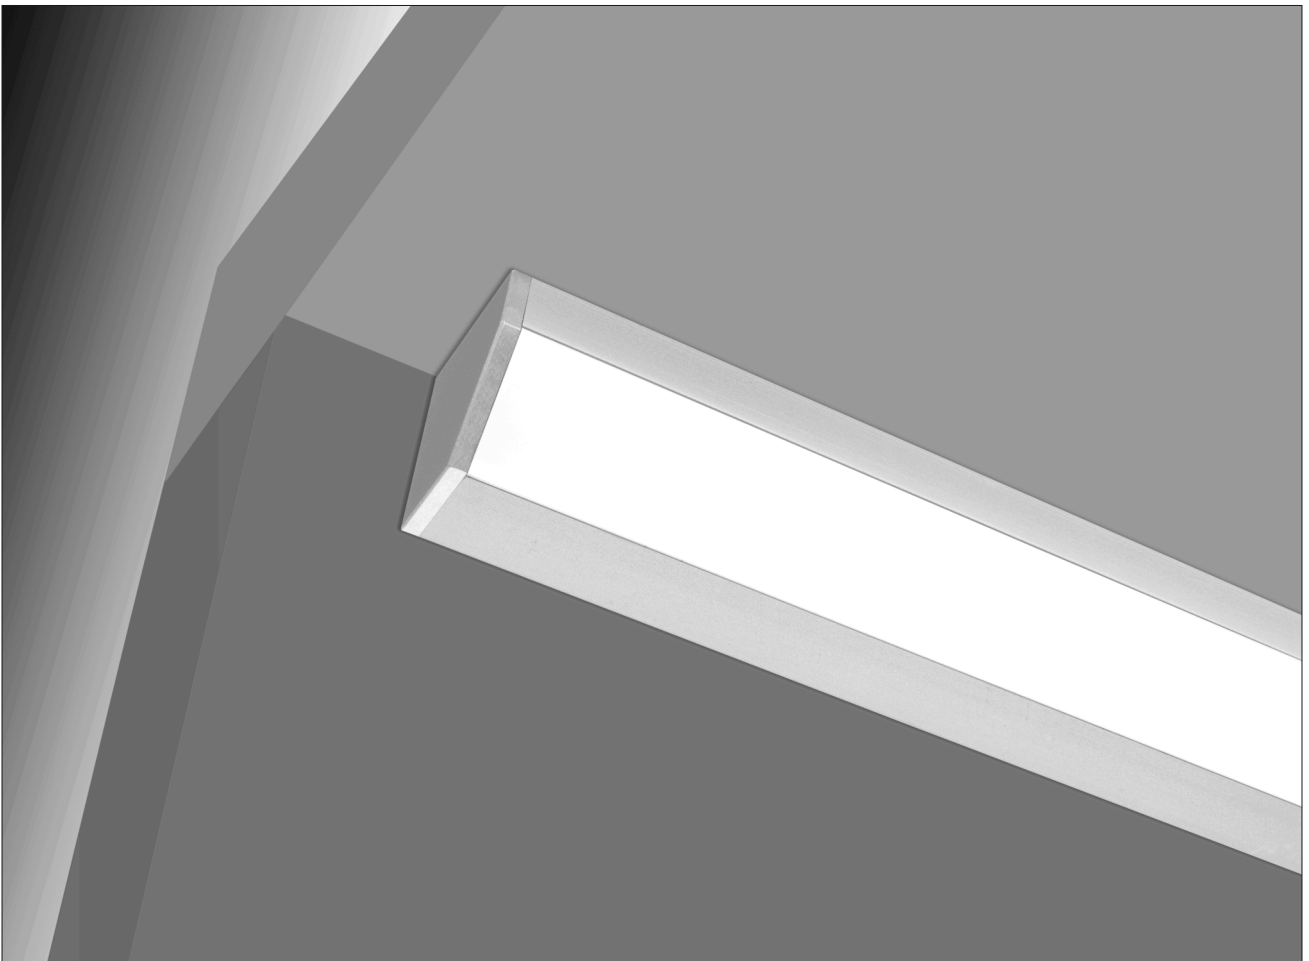

MICRO-C

Corner Mounted

LIGHT FORMS

1. Base Model

MICRO-CWM

Corner & Wall mounted

2. Run Length/Size

Enter length in mm for custom lengths.
See **Standard Lengths and Shapes** PDF for standard products.

3. LED Lamping

DEC - **xxxxK** (example: *DEC-4000K*)

Decorative Output, 612 delivered lm/M, 14.4W/M, 43 lm/W @ 4000K
2700K 3000K 3500K 4000K 5000K 6500K

MED - **xxxxK** (example: *MED-4000K*)

Medium **Output**, 1193 delivered lm/M, 15.3W/M, 78 lm/W @ 4000K
2700K 3000K 3500K 4000K 5000K 6500K

STD - TW

HI - TW

STD - RGBW - **xxxxK**

HI - RGBW - **xxxxK**

Additional LED Options

Tunable White (2700K - 6500K) STD Output LED - 1020 lm/M, 18.5 W/M

Tunable White (2700K - 6500K) HI Output LED - 1530 lm/M, 30 W/M

Standard Output RGB+WHITE - 24V - 355lm/M - 9.6 W/M

2700K 3000K 3500K 4000K 6500K

High Output RGB+WHITE - 24V - 659lm/M - 17.4 W/M

2700K 3000K 3500K 4000K 6500K

4. LED Driver (remote only)

1-10V

DALI

DMX

NONDIM

OTHER

1-10V dimming

DALI dimming

DMX dimming

Non-dimmable

(Consult factory for options)

5. Finish

AL

BK

WH

RAL/ ____

BRONZE

Standard, natural aluminium

Black powdercoat

White powdercoat

Specify RAL powdercoat (ex: #RAL/3003)

Bronze powdercoat

6. Additional options (remote only)

EM

DALIEM

DALIEMPRO

PIR-A

PIR-P

DALIPIR

OTHER

3 hour Emergency Kit - Remote

3 hour DALI Emergency Driver/Battery - Remote

3 hour DALI EMPRO Emergency Driver/Battery - Remote

PIR Absence Detector - Remote

PIR Presence Detector - Remote


DALI PIR Sensor - Remote

Contact Factory

MICRO-C


Corner Mounted

Dimensions

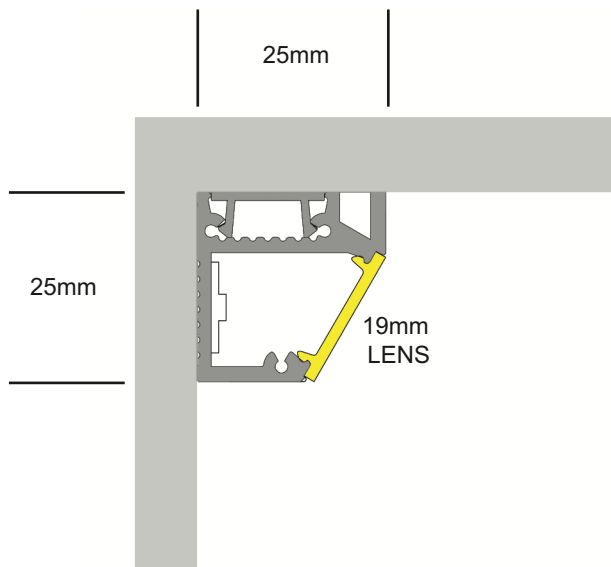

Mounting Options

MICRO-CWM
Corner Mount



MICRO-C

Corner Mounted

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6061 aluminium

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Finish

Standard finish is "Ultimate" aluminium - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process. White, Black, Bronze or custom RAL powdercoat options are also available.



WH - WHITE



AL - ALUMINIUM



RAL/____



BK - BLACK



BRONZE

Default canopy finish is to match fitting color, unless otherwise specified

Light Forms - Configuration Sheet - Rev 2

Light Forms

Architectural Lighting
www.lightforms.com

Registered in England
No. 6750892

Registered Address
Unit 7C Boeing Way
International Trading Centre
Middlesex, UB2 5LB

UK

Unit 7C Boeing Way
International Trading Estate
Middlesex
UB2 5LB

T +44 (0)20 8571 3785
F +44 (0)20 8090 3755
E ask@lightforms.com

India

353/2 Dr Hira Singh Road
Civil Lines
Ludhiana 141001
Punjab, India

T +91 98 7280 0488
E ajay@lightforms.com

China

Unit 3, Building A
No. 9 Phoenix Road
Torch Development Area
Zhongshan City
Guangdong China 528437

T +86 760 899 370 38
F +86 760 899 370 39
E ckirin@lightforms.com