


# CV LED Tape

## 6.6W/m IP20


LFTP-24V-160-IP20-6.6



# LIGHT FORMS

## Tape

This high-efficiency LED tape features 160 LEDs per metre for smooth, uniform illumination with minimal spotting. Available in 3000K, 3500K, and 4000K, it offers flexibility across residential and commercial applications.

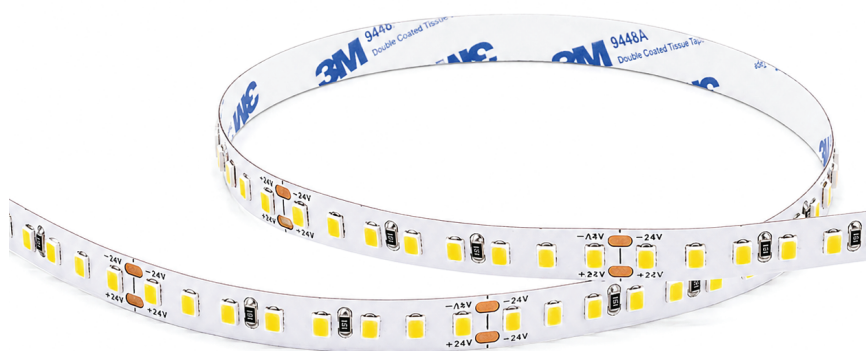

### Features

High-density output with 160 LEDs per metre for smooth, uniform light

Multiple colour temperatures: 3000K, 3500K, 4000K

High colour rendering options: CRI 80, 90, and 95


Strong performance: 630-790 lumens per metre

Efficient 24V system with 6.6W per metre consumption

Slim 8mm PCB for versatile profile integration

5-year fixture warranty

### Dimensions

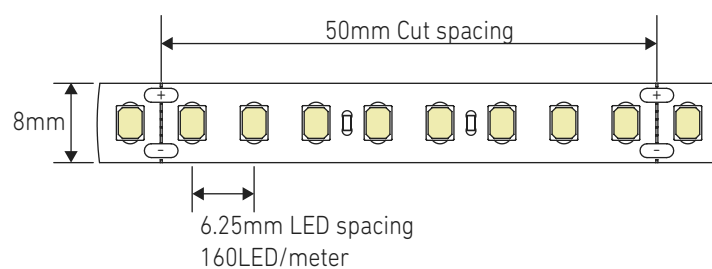

# CV LED Tape

## 6.6W/m IP20

LIGHT FORMS

Type	CRI / CCT	CCT	LED/M	IP	Cutting mm	Lumen lm/m (±5%)	Voltage	Power W (±10%)	Width mm
Minimum (6.6w/m)	80	3000	160	IP20	50	630-790	24	6.6	8
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
Low (7.2w/m)	80	3000	160	IP20	50	1068-1290	24	7.2	8
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
Medium (10.8w/m)	80	3000	160	IP20	50	1600-2000	24	10.8	8
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
Upper Medium (14.4w/m)	80	3000	160	IP20	50	2000-2600	24	14.4	8
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
High (19.2w/m)	80	3000	240	IP20	10	2764-3500	24	19.2	10
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
Max (28w/m)	80	3000	240	IP20	33.3	4446-4724	24	28	10
	90								
	95								
	80	3500							
	90								
	95								
	80	4000							
	90								
	95								
RGB			160	IP20	50	436	24	15	10
RGBW	80	3000	160	IP20	50	488	24	30.8	10
		4000							
Tunable White	80	1800-3000	240	IP20	16.6	891-1853	24	19.2	10
	90	2700-6000	240	IP20	16.6	840-1748	24	18	10