
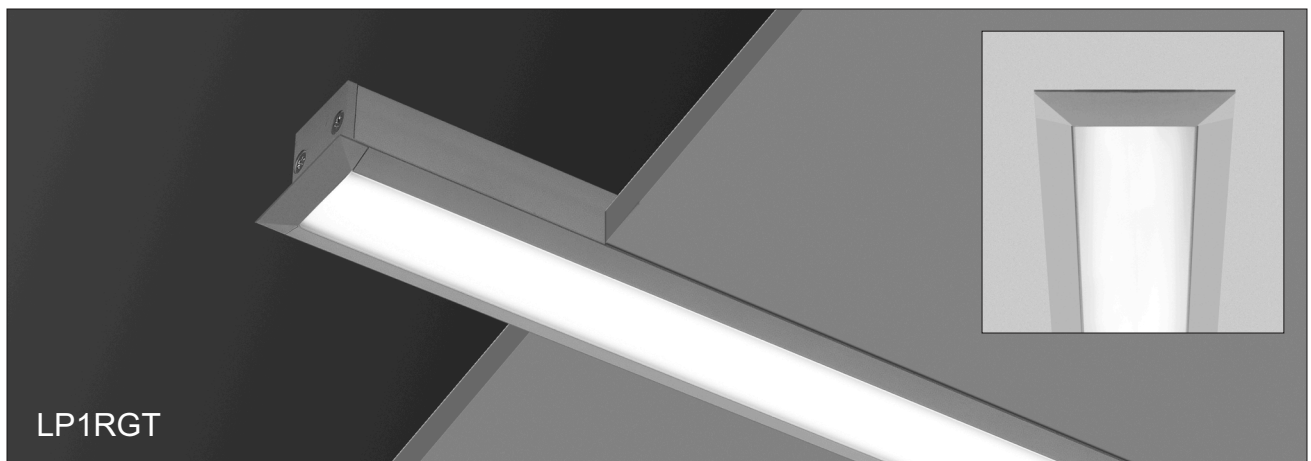


LIGHTPLANE 1 RECESSED

LP1RFT & LP1RGT

Recessed with Flat Trim

Recessed with Tapered Trim

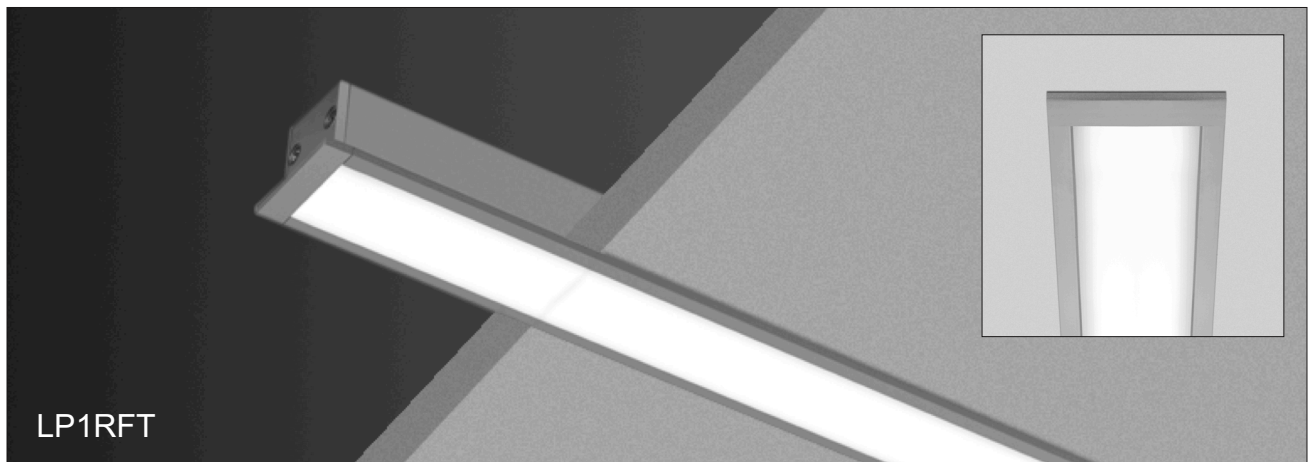

LIGHTPLANE 1 RECESSED

LPLR1FT & LPLR1GT

Recessed w/ Flat Trim - Recessed w/ Tapered Trim

LIGHT FORMS

1. Base Model

LP1RFT	Recessed - (Flat Trim)
LP1RGT	Recessed - (Tapered Trim)

2. Run Length/Size

Enter length in mm for custom lengths.

See **Standard Lengths and Shapes** PDF for standard products.

3. LED Lamping

MED - xxxxK (example: MED-4000K)	Medium Output , 1194 delivered lm/1.2M, 15W/1.2M, 80 lm/W 2700K 3000K 3500K 4000K
HI - xxxxK (example: HI-4000K)	High Output , 2404 delivered lm/1.2M, 28W/1.2M, 86 lm/W 2700K 3000K 3500K 4000K
Additional LED Options	
CV - xxxxK	Constant Voltage - 1240 lm/M, 20W/M - @4000K 2700K 3000K 3500K 4000K 5000K 6500K
STD - TW	Tunable White (2700K - 6500K) STD Output LED - 1060 lm/M, 18.5 W/M
HI - TW	Tunable White (2700K - 6500K) HI Output LED - 1590 lm/M, 30 W/M
STD - xxxxK	Standard Output - 24V - 369 lm/M - 9.6 W/M 2700K 3000K 3500K 4000K 6500K
HI - xxxxK	High Output - 24V - 885 lm/M - 17.4 W/M 2700K 3000K 3500K 4000K 6500K

4. LED Driver (remote only)

1-10V	1-10V dimming
DALI	DALI dimming
DMX	DMX dimming
NONDIM	Non-dimmable
OTHER	(Consult factory for options)

5. Finish

AL	Standard, natural aluminium
BK	Black powdercoat
WH	White powdercoat
RAL/ ____	Specify RAL powdercoat (ex: #RAL/3003)
BRONZE	Bronze powdercoat

6. Additional options (remote only)

EM	3 hour Emergency Kit - remote
DALIEM	3 hour DALI Emergency Driver/Battery - remote
DALIEMPRO	3 hour DALI EMPRO Emergency Driver/Battery - remote
PIR-A	PIR Absence Detector - remote
PIR-P	PIR Presence Detector - remote
DALIPIR	DALI PIR Sensor - remote
OTHER	Contact Factory



LIGHTPLANE 1 RECESSED

LP1RFT & LP1RGT

Recessed w/ Flat Trim - Recessed w/ Tapered Trim




Dimensions

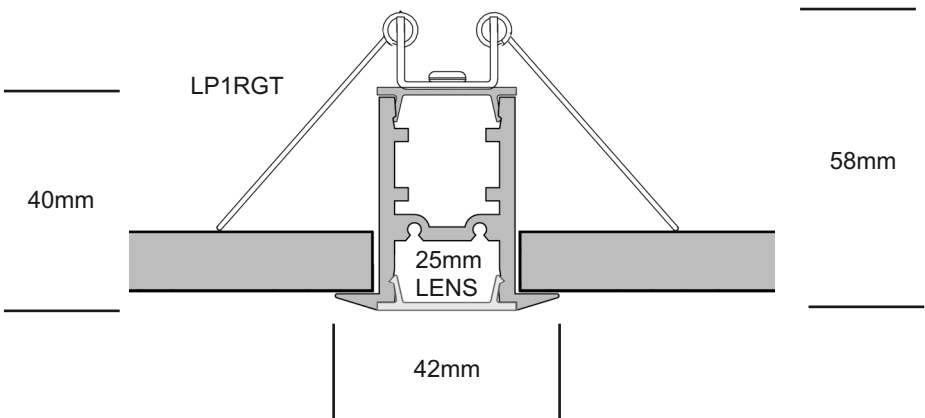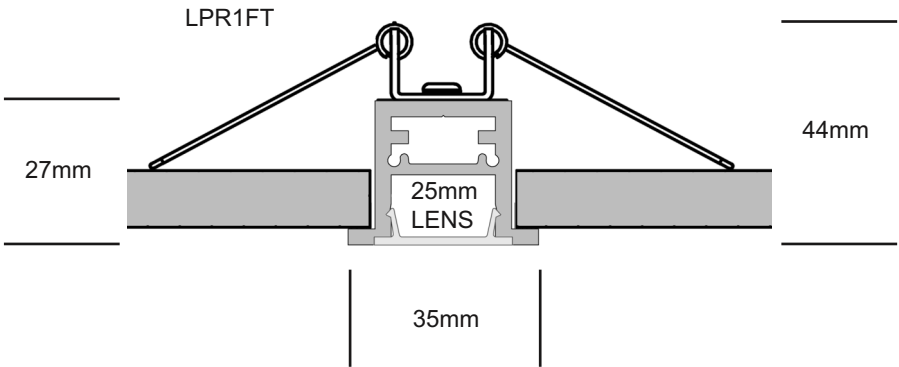

Mounting Options

LP1RFT & LP1RGT
Recessed



LIGHTPLANE 1 RECESSED

LP1RFT & LP1RGT

Recessed w/ Flat Trim - Recessed w/ Tapered Trim

LIGHT FORMS

Housing

100% recyclable, extruded architectural grade T6061 aluminium

Emergency

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

Options

Mitered Corners

Consult factory for mitered corner angle options.

Finish

Standard finish is "Ultimate" aluminium - a smooth, clean and durable finish achieved from a deep-etch and two step clear anodizing process.


White, Black, Bronze or custom RAL powdercoat options are also available.



WH - WHITE



AL - ALUMINIUM



RAL/____


Default canopy finish is to match fitting color, unless otherwise specified



BK - BLACK



BRONZE



Mitered Corners

Light Forms - Configuration Sheet - Rev 3

Light Forms

Architectural Lighting
www.lightforms.com

Registered in England
No. 6750892

Registered Address
Unit 7C Boeing Way
International Trading Centre
Middlesex, UB2 5LB

UK

Unit 7C Boeing Way
International Trading Estate
Middlesex
UB2 5LB

T +44 (0)20 8571 3785
F +44 (0)20 8090 3755
E ask@lightforms.com

India

353/2 Dr Hira Singh Road
Civil Lines
Ludhiana 141001
Punjab, India

T +91 98 7280 0488

E ajay@lightforms.com