


Lightplane 2.5


LP2.5-LED
62mm x 80/85mm



LIGHT FORMS

Linear

The Lightplane 2.5 is a sleek, versatile luminaire designed for various applications, offering direct, indirect, or direct-indirect illumination. It can be suspended, wall-mounted, or surface-mounted, it can be fitted with a 3 circuit or DALI track adaptor, and it can be used within a wide array of suspended ceiling systems.



Features

62mm wide profile.

Individual, continuous run, or configured shape.

Expertly cut and welded mitered corners.

Available in a large range of standard RAL powdercoat finishes as well as a considerable range of premium metallic finishes.

Indirect distribution options available.

Flush diffusers with integrated reflector or Drop diffuser options available.

PMMA or Polycarbonate V0 diffuser options.

Matt Diffuse and Microprismatic options available.

4 standard output options available.

High-quality light with <1% output ripple

Tunable White and RGBW options available.

DALI, DMX, 1-10V, wireless dimming control options.

Integral emergency. Integral spotlights upon request. Integral proximity sensors upon request.

MacAdam 3-step LEDs.

L80 > 50,000hrs at 25°C Ta.

Product Options

Mounting Options

Vertical Suspended
Rod Suspended
Wall Mount
Suspended Ceiling
Surface Mount
Track Mount

Shape Options

Straight
Square
Rectangle
L shape
Cross
T Shape
U Shape
Z shape
Custom Shape

CRI Options

80CRI
90CRI

CCT Options

2700K
3000K
3500K
4000K

Control Options

Non Dimmable
DALI
1-10V
DMX
Wireless

Direct Output Options @ 80CRI 4000K

Minimum (10W) - 1372lm/m
Low (14W) - 2041lm/m
Medium (25W) - 3628lm/m
High (48W) - 6174lm/m
Tuneable Low
Tuneable Medium
RGBW

In-Direct Output Options @ 80CRI 4000K

Minimum(10W) - 1185lm/m
Low(14W) - 1763lm/m
Medium(25W) - 3135lm/m
High(48W) - 5336lm/m
Tunable Low
Tunable Medium
RGBW

Lens Options

Low Glare Prismatic Flush
High Efficiency Prismatic
Prismatic Flush
Opal Flush
Opal Drop


Additions

DALI motion sensor
Standard motion Sensor
BASIC 3 hour emergency
DALI 3 hour emergency
Flush integrated downlight
Integrated adjustable spotlight
Integrated track options


Click here to navigate to the online Product Configurator.




Dimensions

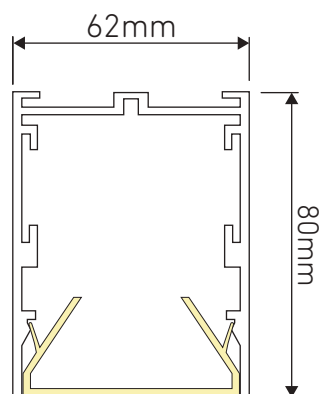


Direct
Flush Diffuser

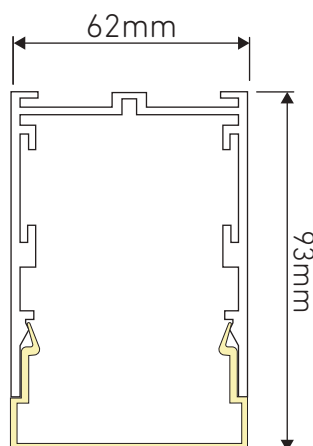


Direct
Drop Diffuser

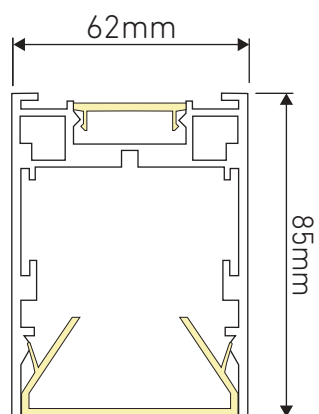

Direct/Indirect
Flush Diffuser

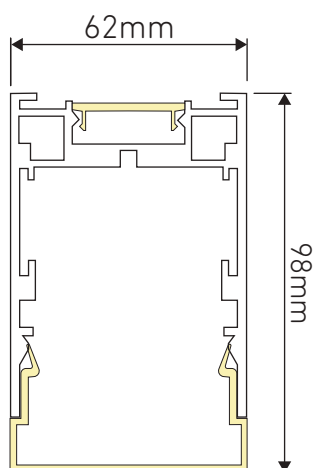


Direct/Indirect
Drop Diffuser

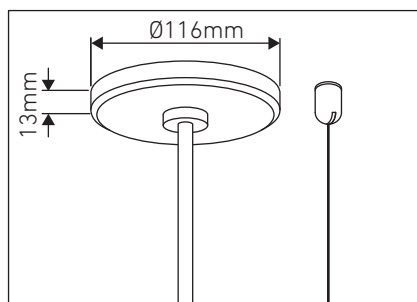

VS -Vertical Suspended


*Drop length supplied 2500mm.
Length adjustable on site.

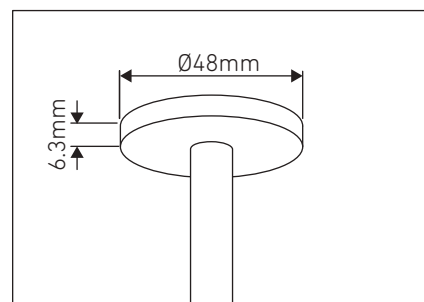

RD -Rod Suspended

*Drop Rod length to be confirmed prior to production.
Not adjustable on site.

Body Colours

	9005	Jet Black		7022	Umbr Grey
	9010	Pure White		7023	Concrete Grey
	1001	Beige		7024	Graphite Grey
	1002	Sand Yellow		7026	Granite Grey
	1007	Daffodil yellow		7030	Stone Grey
	1034	Pastel Yellow		7032	Pebble Grey
	1035	Pearl Beige		7035	Light Grey
	2004	Pure Orange		7037	Dusty Grey
	3011	Brown Red		7043	Traffic Grey B
	3012	Beige Red		7047	Telegrey 4
	4002	Red Violet		7048	Pearl Mouse Grey
	5001	Green Blue		8004	Copper Brown
	5002	Ultramarine Blue		8015	Chestnut Brown
	5008	Grey Blue		8019	Grey Brown
	5009	Azure Blue		8025	Pale Brown
	5011	Steel Blue		9001	Cream
	5012	Light Blue		9002	Grey White
	5013	Cobalt Blue		9003	Signal White
	5025	Pearl Gentian Blue		9004	Signal Black
	6000	Patina Green		9006	White Aluminium
	7009	green Grey		9007	Grey Aluminium
	7010	Tarpaulin Grey		9011	Graphite Black
	7012	Basalt Grey		9016	Traffic White
	7016	Anthracite Grey		9017	Traffic Black
	7021	Black Grey			

Light Forms also covers an extensive range of premium finishes, including specialist metallic finishes.




YW387I
Ordos Sable




M3000I
Nickel Metallic



S2304I
Metallic Fine Texture



YX355F
Mars Sable



YW255F
Golden Beach



Y2205I
Golden Splendour




Y2M30I
Dark Bronze



RW404I
Copper Coarse




EW002E
Aluminium Metallic
Gloss




Y2214F
Anodic Bronze



For full details
and links to the
Interpon powder
range, click here.

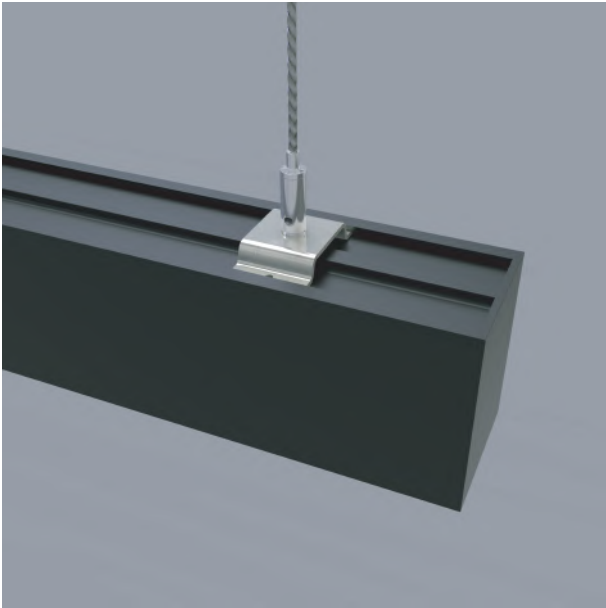

User adjustable sliding brackets. Allowing for on site adjustment of hanging position.

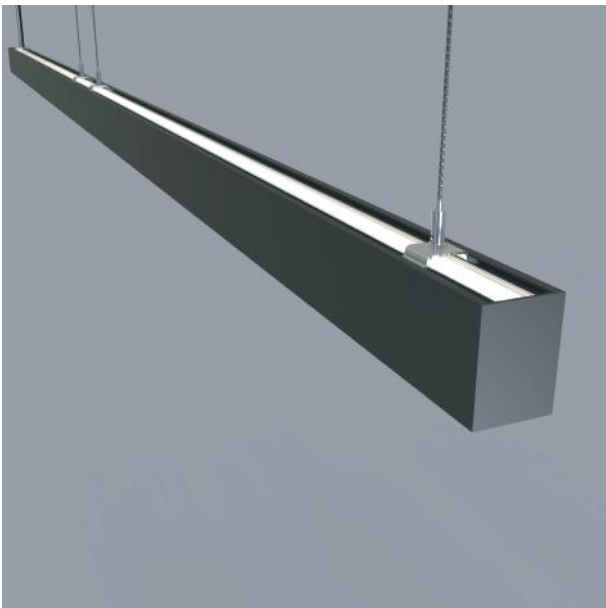

Continuous indirect output options.





