


MoonRing Micro

MR - Mirco — LED
19 mm x 20 mm



LIGHT FORMS

Arc

MoonRing Micro is our slimmest ring luminaire, designed for seamless integration into modern interiors. Offering both direct and indirect distribution, it provides balanced illumination with a minimalist aesthetic. Versatile in application, MoonRing Micro can be installed as a suspended pendant or surface-mounted, making it ideal for a variety of architectural spaces.



Features

Six Diameter

Options:

900 mm

1200 mm

1500 mm

1800 mm

2400 mm

3000 mm

Direct or Indirect
Distribution

One Standard Output

Remote DALI, DMX, 1-10V
and wireless options
available.

Dimming Down to 0%

Remote Sensor Options

Aluminium, White, Black,
Bronze or Custom RAL
Finish

Photometry and additional documentation at:
[LightForms.com/products/all/moonring-micro/](https://lightforms.com/products/all/moonring-micro/)

MoonRing Micro

LIGHT FORMS

Product Options

Direct Output Options

Medium @ 80CRI 4000K
15.4W/m -1424lm/m

CRI Options

80CRI
90CRI

CCT Options

3000K
4000K

Control Options - Remote Only

Non Dimmable
DALI
1-10V
DMX
Wireless


Additions - Remote Only

DALI motion sensor
Standard motion Sensor
BASIC 3 hour emergency
DALI 3 hour emergency


MoonRing Micro

LIGHT FORMS

Dimensions

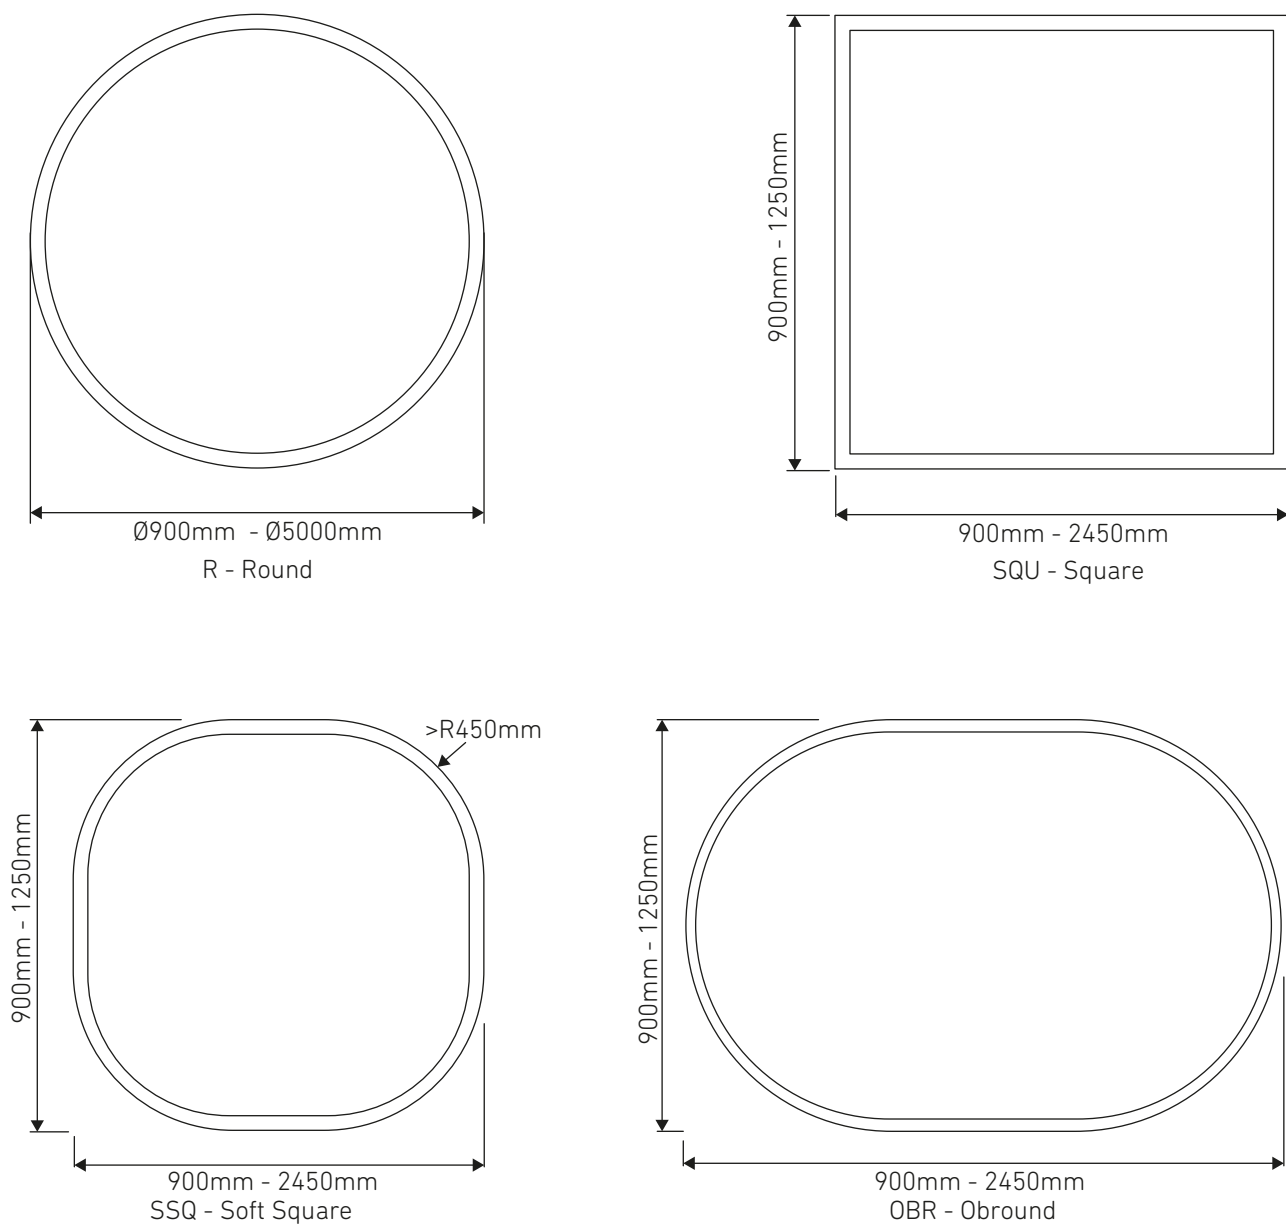

Number of suspension points may vary depending on size

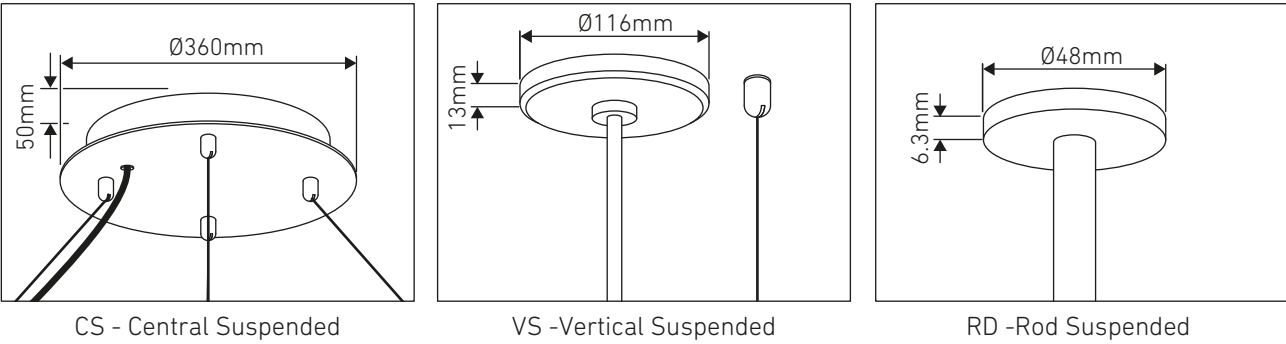

*Length to be confirmed by site, not adjustable on site



MoonRing Micro

LIGHT FORMS


MR-MICRO

Dimensions



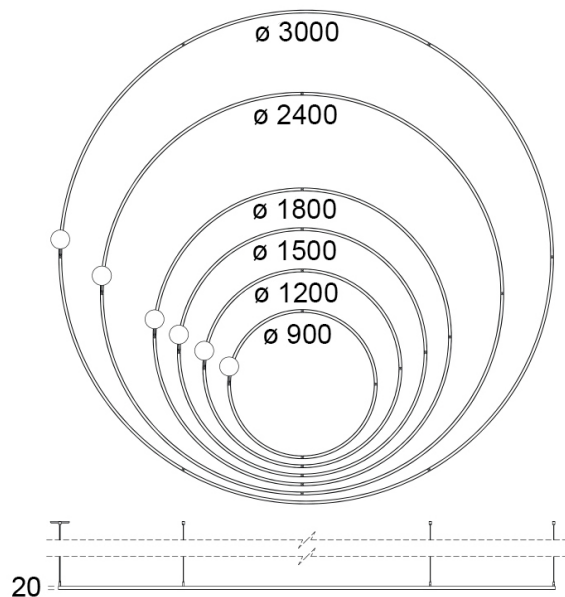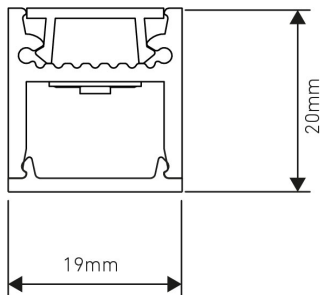



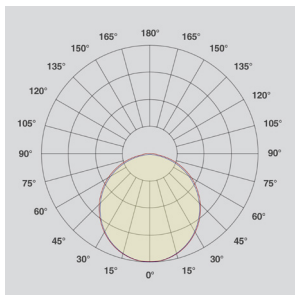

Direct only or indirect only



Distribution



Body Colours

	9005	Jet Black		7022	Umbrage Grey
	9010	Pure White		7023	Concrete Grey
	1001	Beige		7024	Graphite Grey
	1002	Sand Yellow		7026	Granite Grey
	1007	Daffodil yellow		7030	Stone Grey
	1034	Pastel Yellow		7032	Pebble Grey
	1035	Pearl Beige		7035	Light Grey
	2004	Pure Orange		7037	Dusty Grey
	3011	Brown Red		7043	Traffic Grey B
	3012	Beige Red		7047	Telegrey 4
	4002	Red Violet		7048	Pearl Mouse Grey
	5001	Green Blue		8004	Copper Brown
	5002	Ultramarine Blue		8015	Chestnut Brown
	5008	Grey Blue		8019	Grey Brown
	5009	Azure Blue		8025	Pale Brown
	5011	Steel Blue		9001	Cream
	5012	Light Blue		9002	Grey White
	5013	Cobalt Blue		9003	Signal White
	5025	Pearl Gentian Blue		9004	Signal Black
	6000	Patina Green		9006	White Aluminium
	7009	green Grey		9007	Grey Aluminium
	7010	Tarpaulin Grey		9011	Graphite Black
	7012	Basalt Grey		9016	Traffic White
	7016	Anthracite Grey		9017	Traffic Black
	7021	Black Grey			

Light Forms also covers an extensive range of premium finishes, including specialist metallic finishes.



YW387I
Ordos Sable




M3000I
Nickel Metallic



S2304I
Metallic Fine Texture



YX355F
Mars Sable



YW255F
Golden Beach



Y2205I
Golden Splendour




Y2M30I
Dark Bronze



RW404I
Copper Coarse



EW002E
Aluminium Metallic
Gloss



Y2214F
Anodic Bronze



For full details
and links to the
Interpon powder
range, click here.

MoonRing Micro

LIGHT FORMS

MR-MICRO

Housing

100% recyclable, extruded architectural grade aluminium with minimum 2mm thickness.

Weight

Approximately 768-2559 grams per unit. Weight will increase with the addition of integral downlights, sensors, and emergency batteries and may vary further depending on mounting and other options.

Operating temperature

Luminaire MUST be installed and operated ONLY in dry or damp environments where the ambient temperature ranges from -20°C to 50°C. Luminaire operation in environments outside this temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and colour consistency.

Warranty

5-year limited warranty.

Manufacturing & certification

Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe



United Kingdom



Greater India
and Middle East